

1/2" Tube Stub Check Valve - Model 14003


Designed to be welded in place for permanent, leak free installation, these valves are durable, high flow and are available with multiple cracking pressures. Made in USA.

Specifications:

- Operating Pressure 180 psi max.
- Proof Pressure 270 psig
- Burst Pressure 450 psig
- Cracking Pressure
 - 14003000 6-9 psid
 - 14003001 <2.5 psid
 - 14003002 20 psid
 - 14003003 3-5 psid
- Operating Temperatures
 - Minimum -40 °F
 - Maximum +230 °F




Component Materials:

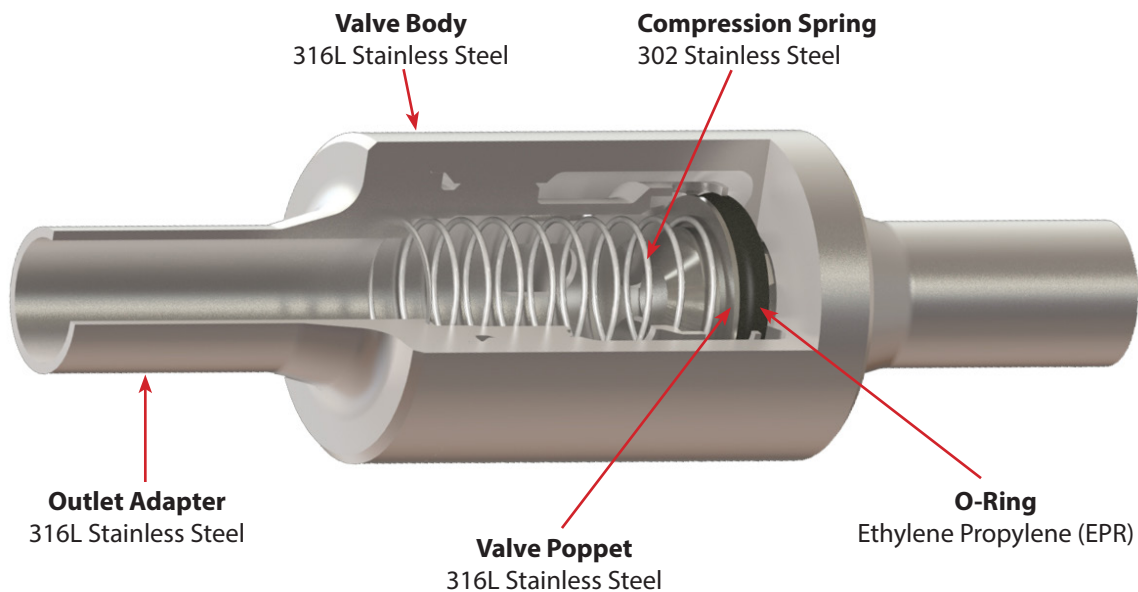

1/2" Tube Stub Check Valve - Model 14003

Dimensions:

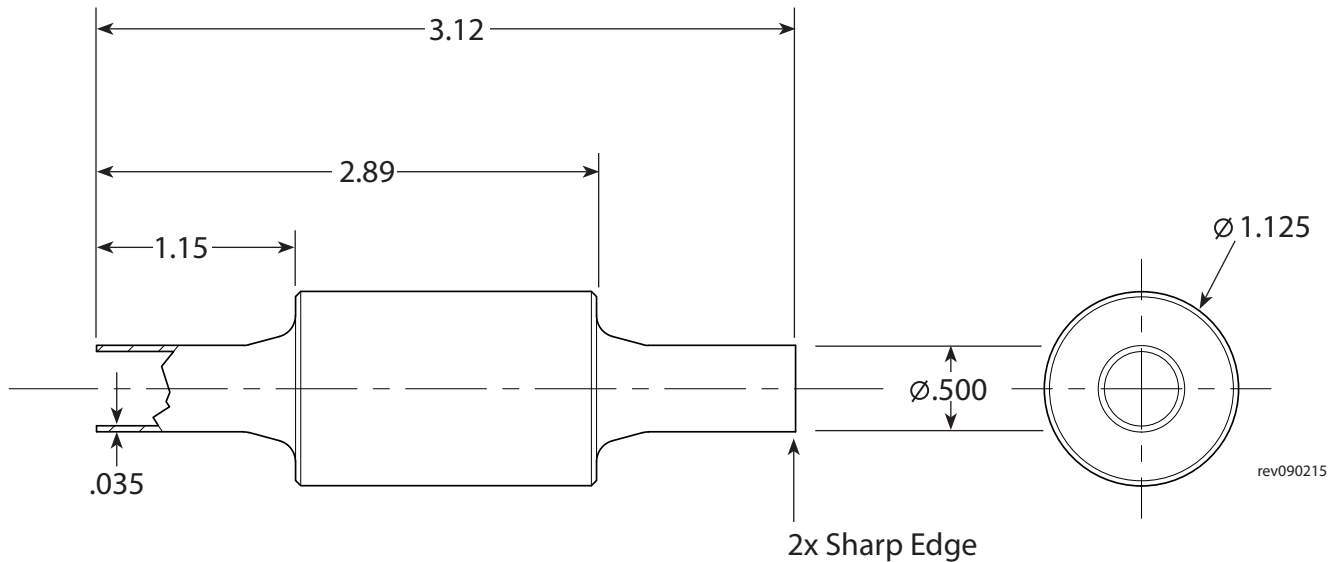

Ordering Information:

1/2" Check valve for 6-9 psid cracking pressure	14003000
1/2" Check valve for <2.5 psid cracking pressure	14003001
1/2" Check valve for 20 psid cracking pressure	14003002
1/2" Check valve for 3-5 psid cracking pressure	14003003