

## Right Angle Swivel – Model 5014

*A dependable, economical swivel for high pressure, high flow applications.  
Made in the USA.*

### Features:

- Spring energized seal for lower friction
- Longer dynamic seal life
- Capable of higher thrust loads
- Compact design

### Specifications:

- Pressure: Up to 1500 psi
- Temperature: 40°F to 180°F
- Rotational Speed: 300 rpm
- Ports: 1/4" NPT<sup>o</sup>

### Materials:


- Body: Stainless steel
- Shaft: CRES 440C
- Seals: Viton, Carbon-graphite filled PTFE variseal with stainless spring
- Seal Retainer: Electroless nickel plated brass
- Bearing Spacer: Electroless nickel plated brass
- Bearing Nut: Electroless nickel plated brass

### Ordering Information:

**Model Number** ————— **5014-M**

For a Repair Kit, order RK5014.

**Outlet**  
M (1/4" male NPT outlet)  
F (1/4" female NPT outlet)

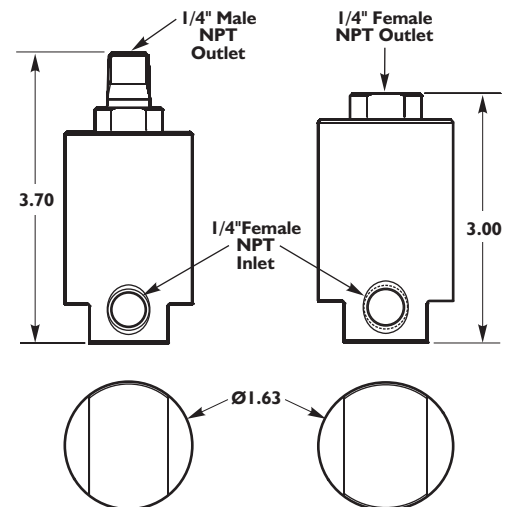

### Applications:

Automatic Carwash Systems, Tire Cleaner Systems, Pressure Cleaners, High Pressure Hose Reels